



625 Central Avenue
 Westfield, NJ 07090
 1-800-818-2932
 Fax: 908-232-5219
 www.wbcindustries.com

Aplix[®] High Shear P.S.A.

SUPPLIER NAME: WBC INDUSTRIES
 625 CENTRAL AVENUE
 WESTFIELD, NJ 07090
 1-800-818-2932

COMMERCIAL PRODUCT NAME: Aplix[®] High Shear P.S.A.
 (Pressure Sensitive Adhesive)

MANUFACTURER: Aplix, Inc.
 12300 Steele Creek Road
 Charlotte, NC 28273

DESCRIPTION:



- Pressure Sensitive Adhesive (P.S.A.) designed for applications on a wide range of substrates: rigid polypropylene, cardboard, glass, Mylar, paper, galvanized metal, stainless steel.

PHYSICAL PROPERTIES:

- Rubber-based Pressure Sensitive Adhesive
- Temperature Range: -20° to 180°F (-29° to 82°C)
- Shelf Life: 1 year from manufacturing date, when stored in original packaging at 70°F (21°C), 50% relative humidity

PERFORMANCE CHARACTERISTICS:

- P.S.A. main characteristics are:
 - **Peel** or adhesion power, measured in Pounds per Inch Width (P.I.W.)
 - **Creep**: the capacity of the P.S.A. to remain in position while under load; measured in Pounds per Square Inch (P.S.I.)

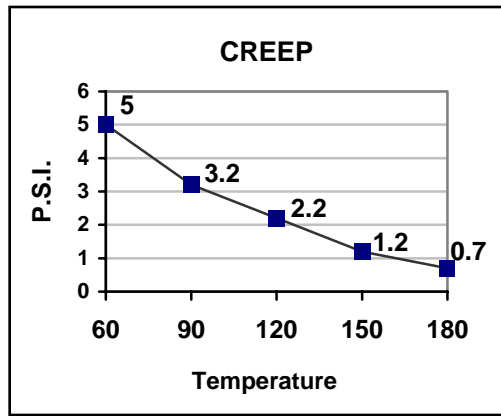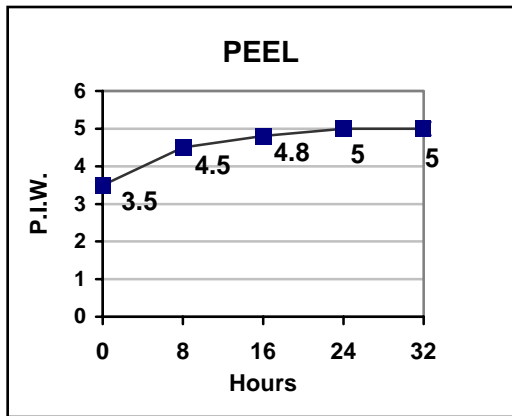

Tests performed on stainless steel at 73°F (23°C) and 50% relative humidity. Data average of multiple tests.

Aplix[®] High Shear P.S.A., continued

DIRECTIONS FOR USE:

- Apply at temperature above 68°F (20°C)
- Make sure the substrate is clean, dry, and free of dust and oil
- Remove the release liner and press into place with firm, even pressure
- Allow at least one hour before loading and disengaging the tapes
- Best performance will be obtained after 24 hours
- Initial adhesion is not an accurate test for measuring performances
- Our experience shows that this PSA generally reacts well with PVC even with plasticizers, however, testing is always recommended.

There is no express warranty, and all implied warranties, including those of merchantability or fitness for a particular purpose, are hereby excluded. Liability for incidental or consequential damages under any and all warranties is hereby excluded to the extent exclusion is permitted by law. All statements, technical device and recommendations contained herein are based on tests believed to be reliable as of 2004, but the accuracy thereof is not guaranteed. Before using, user shall determine the suitability of the product for his intended use, and user assumes all risks and liability whatsoever in connection therewith.